

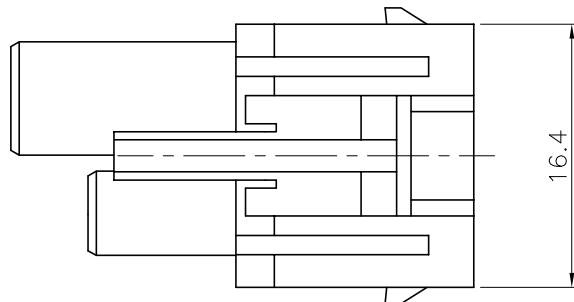


REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		INITIAL RELEASE	HELLER	2019.8.16


受控

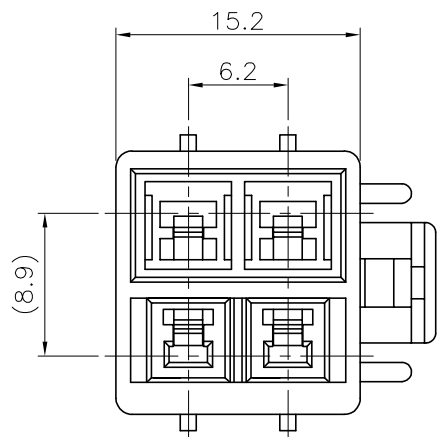

ROHS

Specifications / 技术规格:

- Current rating: 7A
额定电流: 7A
- Voltage rating: 300V AC,DC
额定电压: 300V AC,DC
- Insulation Resistance: 100M ΩMin.
绝缘电阻: 最小100MΩ
- Dielectric Withstanding: 1500V AC 1Min
耐电压: 1500V AC 1分钟
- Contact Resistance: 20mΩ Max.
接触电阻: 最大20mΩ
- Glow wire test: 750°C
灼热丝试验: 750°C
- Operating Temperature: -25°C to +85°C
工作温度: -25°C 到 85°C

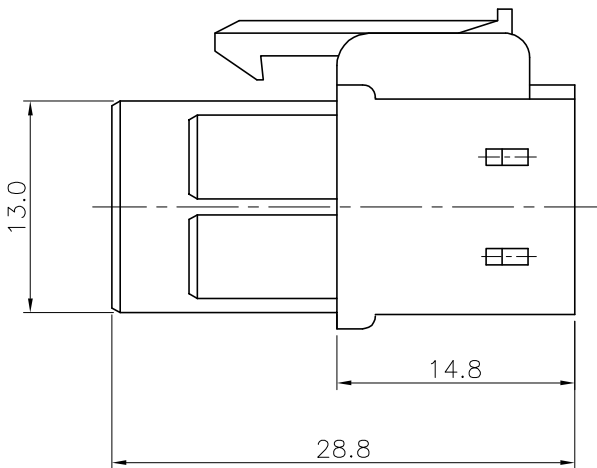

Materials / 材料:
Insulation Material: Nylon/PBT UL94V-0
绝缘体塑胶材质: 尼龙/PBT UL94V-0

浙江快利电子有限公司
Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE	
X.* ± 3'	.XXX: ±--
.X* ± 2'	.XX : ±0.30
.XX* ± 1'	.X : ±0.30
.XXX* ± 0.5'	X. : ±--

DESIGN: HELLER	DATE: 2019-8-16
CHECKED: 朱建慧	DATE: 2019-8-16
APPROVED: 朱建华	DATE: 2019-8-16

DWG. NO.	35151-0419
PART NO.	

TITLE:
6.2 PITCH W/W
FEMALE HSG -4P

REV.	UNIT.	SCALE.	
A	MM	1:1	