


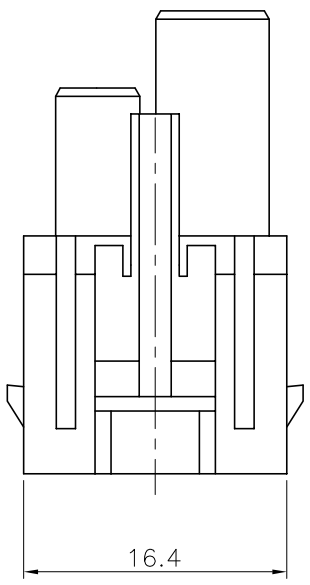


REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		INITIAL RELEASE	HELLER	2019.8.16

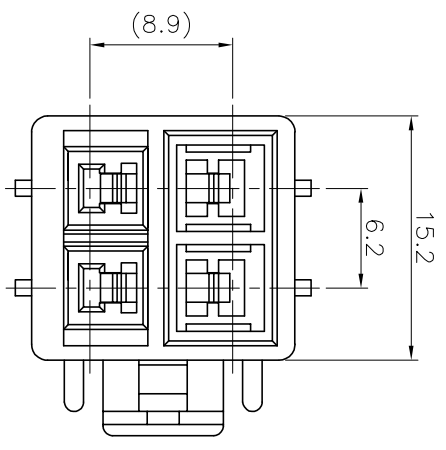

ROHS

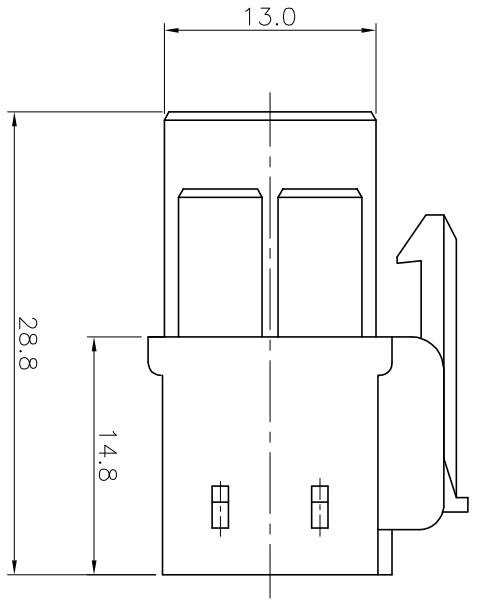

Specifications / 技术规格:

- Current rating: 7A
 - 额定电流: 7A
 - Voltage rating: 300V AC,DC
 - 额定电压: 300V AC,DC
 - Insulation Resistance: 100M ΩMin.
 - 绝缘电阻: 最小100MΩ
 - Dielectric Withstanding: 1500V AC 1Min
 - 耐电压: 1500V AC 1分钟
 - Contact Resistance: 20mΩ Max.
 - 接触电阻: 最大20mΩ
 - Glow wire test:750°C
 - 灼热丝试验: 750°C
 - Operating Temperature: -25°C to +85°C
 - 工作温度: -25° C 到85° C
- Materials / 材料:**
- Insulation Material: Nylon/PBT UL94V-0
- 绝缘体塑胶材质: 尼龙/PBT UL94V-0

<p>浙江快利电子有限公司 Zhejiang Kuaili Electronic Co., Ltd</p>		<p>GENERAL TOLERANCE</p> <table border="1"> <tr> <td>X* ± 3'</td> <td>.XXX: ±---</td> </tr> <tr> <td>X* ± 2'</td> <td>.XX: ±0.30</td> </tr> <tr> <td>.XX* ± 1'</td> <td>.X: ±0.30</td> </tr> <tr> <td>.XXX* ± 0.5'</td> <td>X: ±---</td> </tr> </table>		X* ± 3'	.XXX: ±---	X* ± 2'	.XX: ±0.30	.XX* ± 1'	.X: ±0.30	.XXX* ± 0.5'	X: ±---	<p>DESIGN: HELLER</p> <p>CHECKED: 朱建慧</p> <p>APPROVED: 朱建华</p>		<p>DATE: 2019-8-16</p> <p>DATE: 2019-8-16</p>		<p>DWG. NO.</p> <p>PART NO.</p>		<p>TITLE:</p>	
X* ± 3'	.XXX: ±---																		
X* ± 2'	.XX: ±0.30																		
.XX* ± 1'	.X: ±0.30																		
.XXX* ± 0.5'	X: ±---																		
REV.	A	UNIT.	MM	SCALE:	1:1			<p>6.2 PITCH W/W FEMALE HSG -4P</p>											