
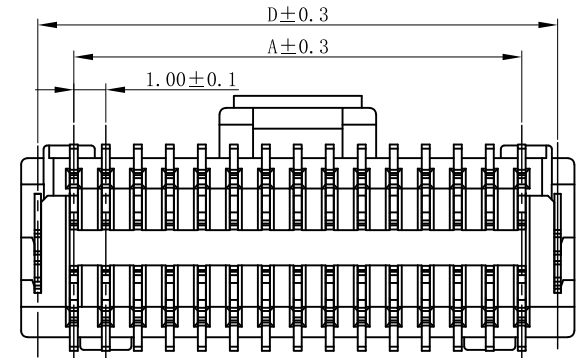
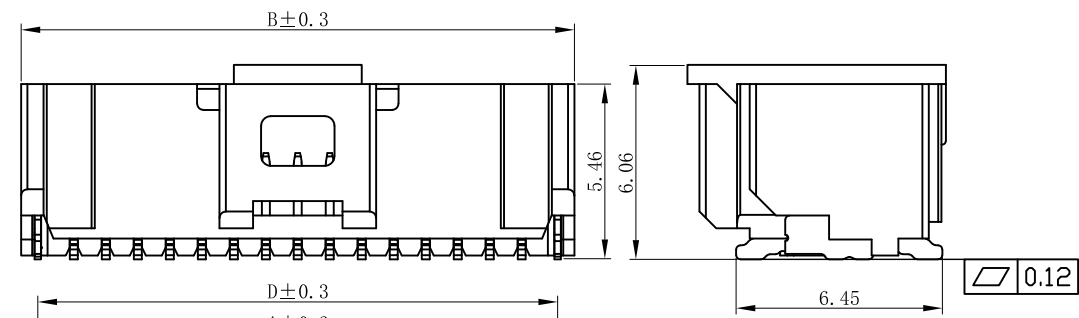
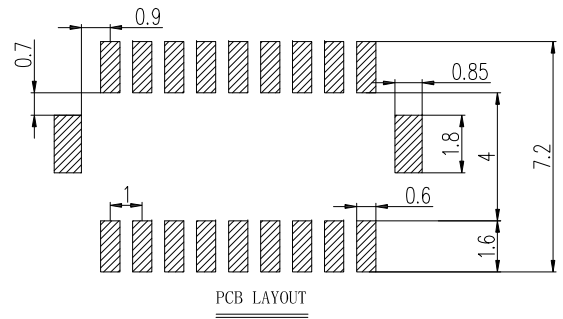


RoHS

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	KEVIN	2015.03.10

Specifications/技术规格:
 Current rating: 1A (AWG#28)
 额定电流: 1A (AWG#28)
 Voltage rating: 100V AC, DC
 额定电压: 100V AC, DC
 Insulation Resistance: 100M Min.
 绝缘电阻: 最小100MΩ
 Withstanding voltage: 300V AC 1Min
 耐电压: 300V AC 1分钟
 Contact Resistance: 20m Max
 接触电阻: 最大20mΩ
 Operating Temperature: -25° C to +85° C
 工作温度: -25° C 到 85° C
Materials/材料:
 Insulation Material: LCP UL94V-0
 绝缘体塑胶材质: LCP UL94V-0

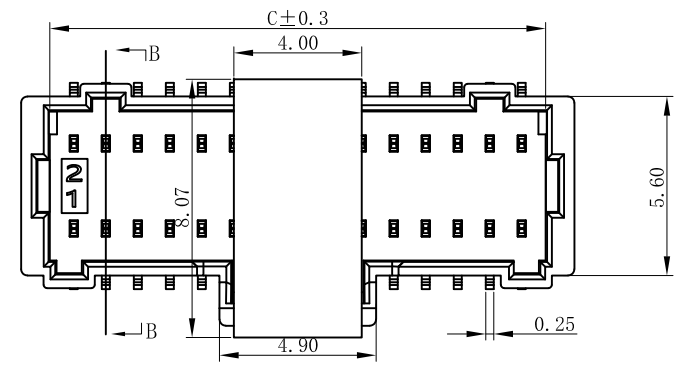

PIN 数	DIM			
	A	B	C	D
2X2	1.00	4.30	2.50	3.25
2X3	2.00	5.30	3.50	4.25
2X4	3.00	6.30	4.50	5.25
2X5	4.00	7.30	5.50	6.25
2X6	5.00	8.30	6.50	7.52
2X7	6.00	9.30	7.50	8.25
2X8	7.00	10.30	8.50	9.25
2X9	8.00	11.30	9.50	10.20
2X10	9.00	12.30	10.50	11.25
2X11	10.00	13.30	11.50	12.25
2X12	11.00	14.30	12.50	13.25
2X13	12.00	15.30	13.50	14.25
2X14	13.00	16.30	14.50	15.25
2X15	14.00	17.30	15.50	16.25
~~				
2X20	19.00	22.30	20.50	21.25
~~				
2X25	24.00	27.30	25.50	26.25

浙江快利电子有限公司
 Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE	
X. °±3°	.XXX ±0.10
.X° ±2°	.XX ±0.15
.XX° ±1°	.X ±0.25
.XXX° ±0.5°	X. ±0.35

DESIGN:	王鑫	DATE:	2025. 7. 1
CHECKED:	朱继衡	DATE:	2025. 7. 1
AUDITED:	王子林	DATE:	2025. 7. 1
APPROVED:	朱建华	DATE:	2025. 7. 1

DWG. NO.	PART NO. KL-A1001-2XNALT
TITLE.	

TITLE.
A1001-2XNALT

REV. A	UNIT. MM	SCALE. 1:1	
--------	----------	------------	--