

1 2 3 4 5 6 7 8 9

F





E

D

C

B

A

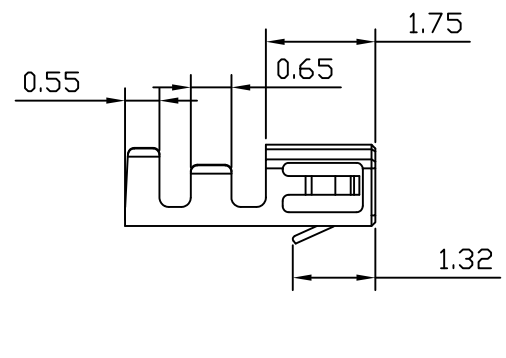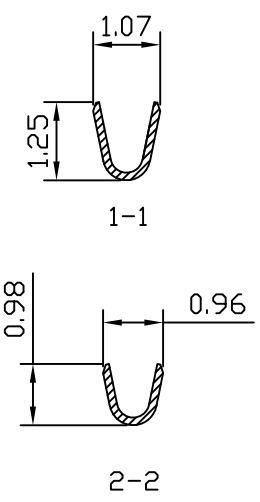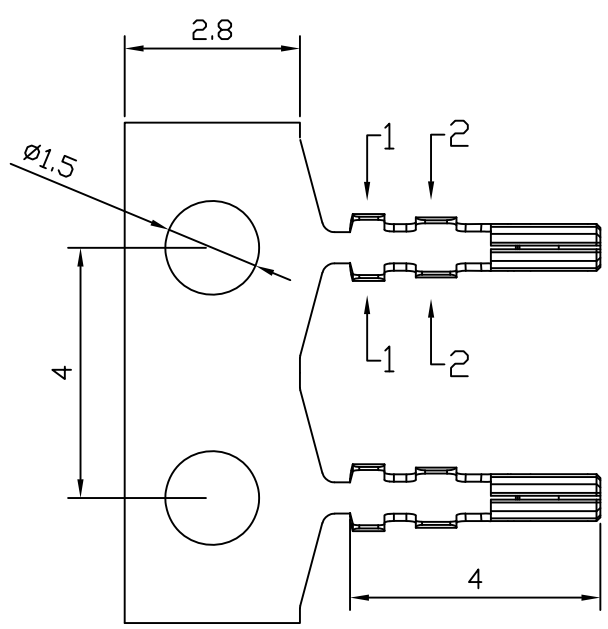



Specifications/技术规格:

Current Rating: 1A (AWG#28)
 额定电流: 1A (AWG#28)
 Voltage rating: 100V AC, DC
 额定电压: 100V AC, DC
 Insulation Resistance: 100 MΩ Min.
 绝缘电阻: 最小100MΩ
 Dielectric Withstanding: 300V AC
 耐电压: 300V AC
 Contact Resistance: 20mΩ Max.
 接触电阻: 最大20mΩ
 Operating Temperature: -25° C to +85° C
 工作温度: -25° C 到 85° C

Materials/材料:

Contact Material: Phosphor Bronze (Tin plated)
 接触端子材料: 磷铜 (镀锡)

 **浙江快利电子有限公司**
 Zhejiang Kuaili Electronic Co., Ltd

REV. A	UNIT. MM	SCALE. ---	
--------	----------	------------	---

GENERAL TOLERANCE		DESIGN: 王鑫	DATE: 2025.3.2	DWG. NO.	TITLE.
X. ° ± 3°	.XXX: --	AUDITED: 王子林	DATE: 2025.3.2		
.X ° ± 2°	.XX : ± 0.20	APPROVED: 朱建华	DATE: 2025.3.2	PART NO.	A1001-TE
.XX ° ± 1°	.X : ± 0.30				
.XXX ° ± 0.5°	X. : --				

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A