

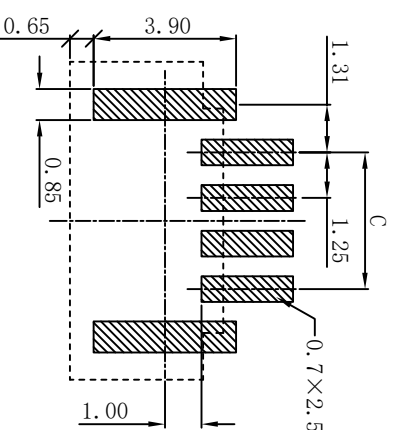

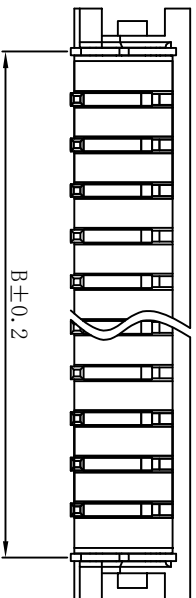


ROHS/HF

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	KEVIN	2015.03.10

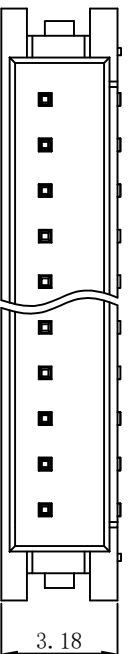

Recommended P.C.Board Hole Layout

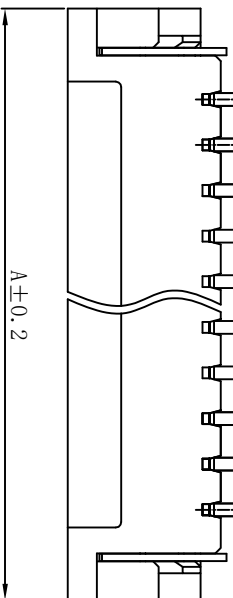

P数	DIM=A	DIM=B	DIM=C
16	23.75	21.37	18.75
15	22.50	20.12	17.50
14	21.25	18.87	16.25
13	20.00	17.62	15.00
12	18.75	16.37	13.75
11	17.50	15.12	12.50
10	16.25	13.87	11.25
9	15.00	12.62	10.00
8	13.75	11.37	8.75
7	12.50	10.12	7.50
6	11.25	8.87	6.25
5	10.00	7.62	5.00
4	8.75	6.37	3.75
3	7.50	5.12	2.50
2	6.25	3.87	1.25

Specifications / 技术规格:

Current rating: 1A  
 额定电流: 1A  
 Voltage rating: 50V AC,DC  
 额定电压: 50V AC,DC  
 Insulation Resistance: 500M ΩMin.  
 绝缘电阻: 最小500MΩ  
 Dielectric Withstanding: 500V AC 1Min  
 耐电压: 500V AC 1分钟  
 Contact Resistance: 20mΩ Max.  
 接触电阻: 最大20mΩ  
 Operating Temperature: -25°C to +85°C  
 工作温度: -25°C 到85°C  
 Materials / 材料:  
 Contact Material: Brass (Tin plating)  
 接触端子材料: 黄铜(镀锡)  
 Soldering Material: Phos.bronze (Tin plating)  
 焊脚材料: 磷铜(镀锡)  
 Insulation Material: LCP or PA UL94V-0  
 绝缘体塑胶材料: LCP 或 PA UL94V-0

GENERAL TOLERANCE

X' ± 3'	.XXX: ±0.10	DESIGN: KEVIN	DATE: 15.3.10	DWG. NO.
X' ± 2'	.XX: ±0.15	CHECKED: 朱前程	DATE: 15.3.10	PART NO. KL-DF13-NAWT
.XX' ± 1'	.X: ±0.25	AUDITED: 张宁	DATE: 15.3.10	
.XXX' ± 0.5'	X: ±0.35	APPROVED: 朱建华	DATE: 15.3.10	

TITLE

DF13-NAWT卧式贴片



浙江快利电子有限公司  
 Zhejiang Kuaili Electronic Co., Ltd

REV. A	UNIT. MM	SCALE: 1:1	
--------	----------	------------	--