


RoHS

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	KEVIN	2015.03.10

Specifications/技术规格:  
 Current rating: 3A (AWG#24)  
 额定电流: 3A (AWG#24)  
 Voltage rating: 250V AC, DC  
 额定电压: 250V AC, DC  
 Insulation Resistance: 1000M Min.  
 绝缘电阻: 最小1000MΩ  
 Contact Resistance: 20m Max  
 接触电阻: 最大20mΩ  
 Materials/材料:  
 Contact Material: Phosphor Bronze  
 接触端子材料: 磷铜

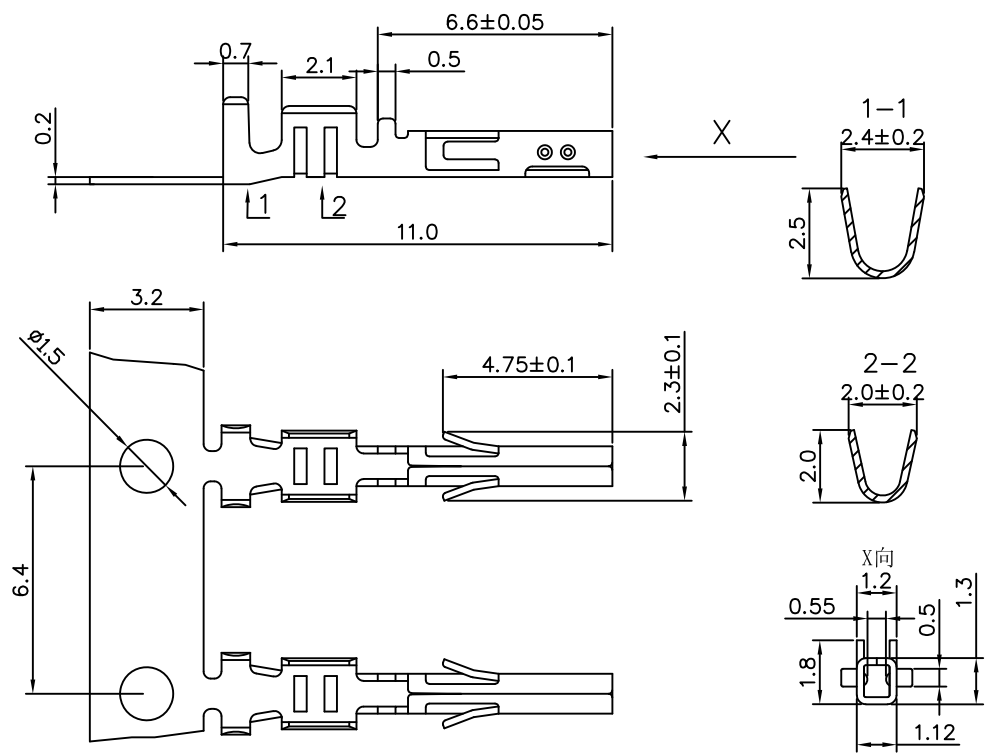


 浙江快利电子有限公司  
 Zhejiang Kuaili Electronic Co., Ltd

GENERAL TOLERANCE	
X. °±3°	.XXX ±0.15
.X° ±2°	.XX ±0.25
.XX° ±1°	.X ±0.30
.XXX° ±0.5°	X. ±0.35

DESIGN:	王鑫	DATE:	2026.1.8
CHECKED:	朱继衡	DATE:	2026.1.8
AUDITED:	王子林	DATE:	2026.1.8
APPROVED:	朱建华	DATE:	2026.1.8

DWG. NO.	PART NO. KL-MX3.0-TE
TITLE.	

MX3.0-TE

REV.	A	UNIT.	MM	SCALE.	1:1	
------	---	-------	----	--------	-----	---