
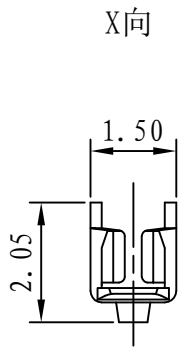




此处刻公司LOGO(KL或KLDZ),具体以实物为准

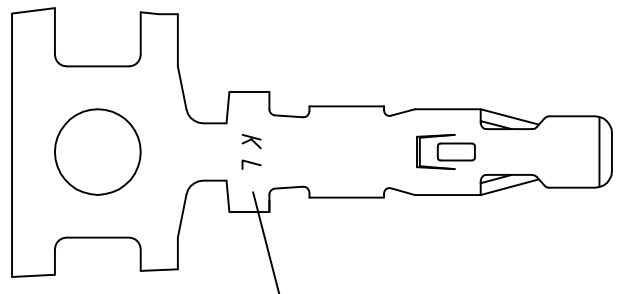

Specifications/技术规格:

- Current Rating: 3A
额定电流: 3A
- Insulation Resistance: 1000 MΩ Min.
绝缘电阻: 最小1000MΩ
- Dielectric Withstanding: 800V AC
耐电压: 800V AC
- Contact Resistance: 20mΩ Max.
接触电阻: 最大20mΩ
- Operating Temperature: -25°C to +85°C
工作温度: -25°C 到 85°C

Materials/材料:

Contact Material: Phosphor Bronze(Tin plated)
接触端子材料: 磷铜(镀锡)

 浙江快利电子有限公司
Zhejiang Kuaili Electronic Co., Ltd


GENERAL TOLERANCE	
X. ± 3'	X. ± 0.35
.X ± 2'	.X ± 0.25
.XX ± 1'	.XX ± 0.15
.XXX ± 0.5'	.XXX ± 0.10

DESIGN: KEVIN
CHECKED: SOUL
AUDITED: 张宁
APPROVED: 朱建华

DATE: 13'.2.20
DATE: 13'.2.20
DATE: 13'.2.21
DATE: 13'.2.22

DWG. NO. -----
PART NO. KL-PHD-TE

TITLE. PHD-TE

REV. A	UNIT. MM	SCALE. ---	
--------	----------	------------	---