

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面	HELLER	2023. 05. 06
a	20241122001	产品不防呆	王鑫	2024. 11. 22

Specifications / 技术规格:

Current Rating: 1A AC,DC(AWG #28)

额定电流: 1A AC,DC(AWG #28) 额定

Voltage rating: 50V AC,DC

电压: 50V AC,DC

Insulation Resistance: 500MΩ Min.

绝缘电阻: 最小500MΩ

Dielectric Withstanding: 500V AC

耐电压: 500V AC





Operating Temperature: -25°C to +85°C

工作温度: -25°C 到 85°C

Insulation Material: PA or PBT UL94V-2/0

材料: PA或PBT UL94V-2/0

PIN 数	DIM				
	A	B	C	D a	E
2X2	1.00	6.70	5.00	3.50	2.70
2X3	2.00	7.70	6.00	4.50	3.70
2X4	3.00	8.70	7.00	5.50	4.70
2X5	4.00	9.70	8.00	6.50	5.70
2X6	5.00	10.70	9.00	7.50	6.70
2X7	6.00	11.70	10.00	8.50	7.70
2X8	7.00	12.70	11.00	9.50	8.70
2X9	8.00	13.70	12.00	10.50	9.70
2X10	9.00	14.70	13.00	11.50	10.70
2X11	10.00	15.70	14.00	12.50	11.70
2X12	11.00	16.70	15.00	13.50	12.70
2X13	12.00	17.70	16.00	14.50	13.70
2X14	13.00	18.70	17.00	15.50	14.70
2X15	14.00	19.70	18.00	16.50	15.70
2X16	15.00	20.70	19.00	17.50	16.70
~~					
2X20	19.00	24.70	23.00	21.50	20.70
~~					
2X25	24.00	29.70	28.00	26.50	25.70
~~					
2X30	29.00	34.70	33.00	31.50	30.70

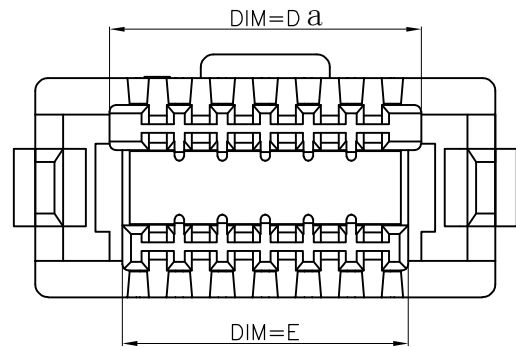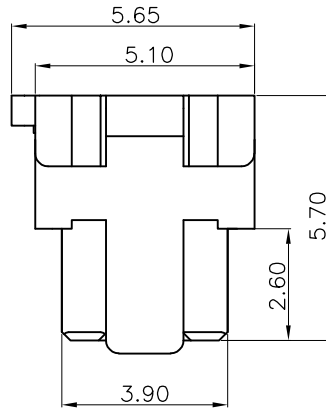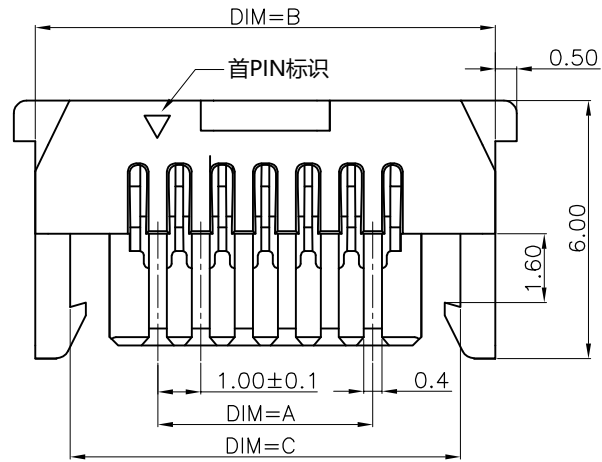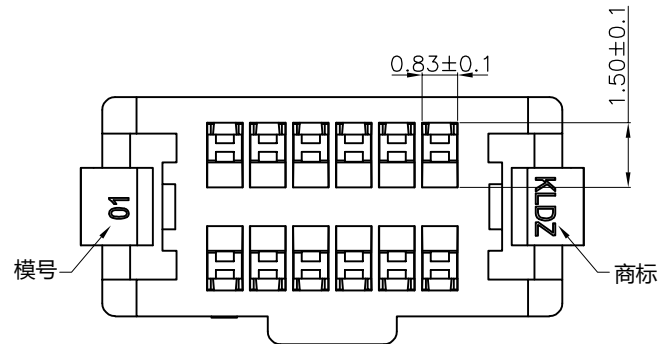

**浙江快利电子有限公司**  
ZheJiang KuaiLi Electronic Co., LTD.

GENERAL TOLERANCE	
X.: ± 3'	X.: ±0.40
.X: ± 2'	X.X: ±0.30
.XX: ± 1'	X.XX: ±0.20
.XXX: ± 0.5'	X.XXX: ±0.10

DESIGN:	徐民建	DATE:	2023-05-06
CHECKED:	王子林	DATE:	2023-05-06
APPROVED:	朱建华	DATE:	2023-05-06

DWG. NO.	
PART NO.	KL-SHLD-2*NY

TITLE.	SHLD-2*NY
--------	-----------

REV.	UNIT.	SCALE.	PROJ.
A	mm	-	