

REV.	ECN NO	DESCRIPTION	REVISED	DATE

Specifications/技术规格:

Current Rating: 3A

额定电流: 3A

Insulation Resistance: 1000MΩ Min.

绝缘电阻: 最小1000MΩ

Dielectric Withstanding: 1000V AC

耐电压: 1000V AC

Contact Resistance: 20mΩ Max.

接触电阻: 最大20mΩ

Operating Temperature: -25°C to +85°C







工作温度: -25°C 到 +85°C

Materials/材料:

Insulation Material: PA Glow wire

绝缘体塑胶材料: 尼龙 灼热丝

16	XH/MS-16Y	42.5	40.6	37.5
15	XH/MS-15Y	40	38.1	35
14	XH/MS-14Y	37.5	35.6	32.5
13	XH/MS-13Y	35	33.1	30
12	XH/MS-12Y	32.5	30.6	27.5
11	XH/MS-11Y	30	28.1	25
10	XH/MS-10Y	27.5	25.6	22.5
9	XH/MS-9Y	25	23.1	20
8	XH/MS-8Y	22.5	20.6	17.5
7	XH/MS-7Y	20	18.1	15
6	XH/MS-6Y	17.5	15.6	12.5
5	XH/MS-5Y	15	13.1	10
4	XH/MS-4Y	12.5	10.6	7.5
3	XH/MS-3Y	10	8.1	5
2	XH/MS-2Y	7.5	5.6	2.5
孔数	ENG NO.	A	B	C

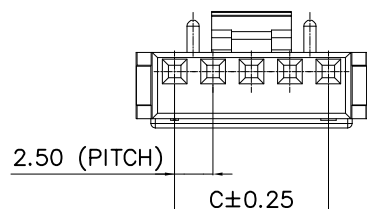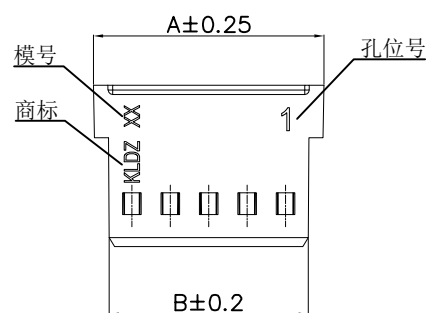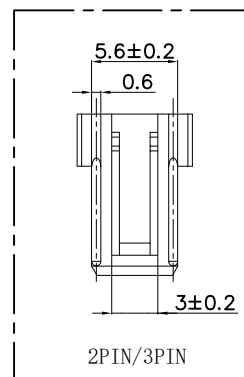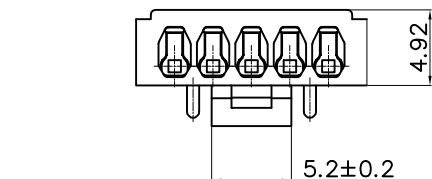

 浙江快利电子有限公司
ZheJiang KuaiLi Electronic Co., LTD.

GENERAL TOLERANCE

X. ° : ±3°	X. : --
. X° : ±2°	X. X: ±0.30
. XX° : ±1°	X. XX: ±0.20
. XXX° ±0.5°	X. XXX: ±0.10

DESIGN: 张乐友

DATE: 2025.04.26

DWG. NO.

TITLE.

CHECKED: 王子林

DATE: 2025.04.26

PART NO.

XH/MS-NY 胶壳

APPROVED: 朱建华

DATE: 2025.04.26

KL-XH/MS-NY-B-03-BE

REV.	UNIT.	SCALE.	PAGE.	PROJ.
A1	mm	-	1/1	