
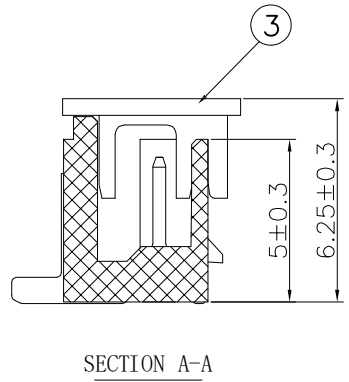


REV.	ECN NO	DESCRIPTION	REVISED	DATE

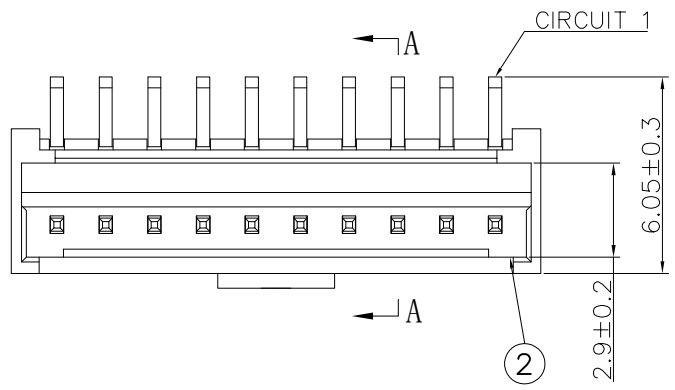

**Specifications/技术规格:**

Current rating: 2.5A (AWG#24)  
 额定电流: 2.5A (AWG#24)


Voltage rating: 250V AC, DC  
 额定电压: 250V AC, DC

Insulation Resistance: 1000MΩ Min.  
 绝缘电阻: 最小1000MΩ

Withstanding voltage: 500V AC 1Min  
 耐压: 500V AC 1分钟



Contact Resistance: 20mΩ Max  
 接触电阻: 最大20mΩ

Operating Temperature: -25°C to +85°C  
 工作温度: -25°C 到 +85°C

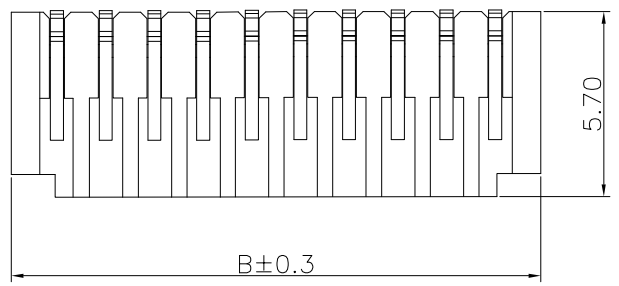

3	③	吸盖	LCP	1	UL94V-0
2	②	针座	LCP	1	UL94V-0
1	①	插针	铜	N*	镀锡
序号	图号	名称	材料	数量	备注

PIN 数	DIM	
	A	B
ZHG-2ALT	1.50	4.30
ZHG-3ALT	3.00	5.80
ZHG-4ALT	4.50	7.30
ZHG-5ALT	6.00	8.80
ZHG-6ALT	7.50	10.30
ZHG-7ALT	9.00	11.80
ZHG-8ALT	10.50	13.30
ZHG-9ALT	12.00	14.80
ZHG-10ALT	13.50	16.30
ZHG-11ALT	15.00	17.80
ZHG-12ALT	16.50	19.30
ZHG-13ALT	18.00	20.80
ZHG-14ALT	19.50	22.30
ZHG-15ALT	21.00	23.80

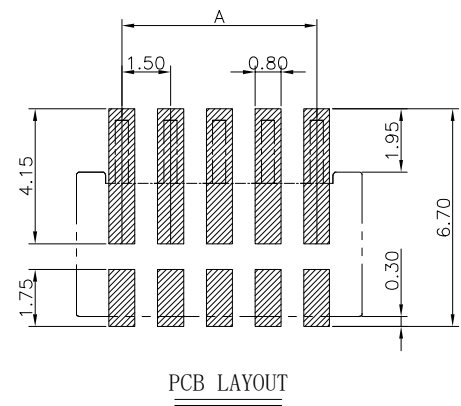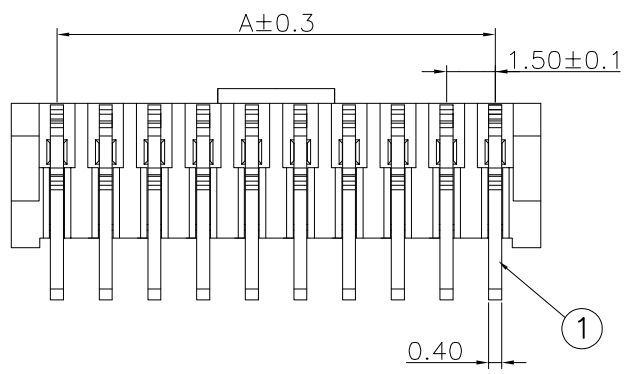

**浙江快利电子有限公司**  
 ZheJiang KuaiLi Electronic Co., LTD.

REV. A1    UNIT. mm    SCALE. -    PAGE. 1/1    PROJ.

GENERAL TOLERANCE	
X. ° : ±3°	X. : —
.X ° : ±2°	X.X : ±0.30
.XX ° : ±1°	X.XX : ±0.20
.XXX ° : ±0.5°	X.XXX : ±0.10

DESIGN: 张乐友    DATE: 2026.03.20

CHECKED: 王子林    DATE: 2026.03.20

APPROVED: 朱建华    DATE: 2026.03.20

DWG. NO.

PART NO.

TITLE:

**ZHG-NALT**