





REV.	ECN NO	DESCRIPTION	REVISED	DATE

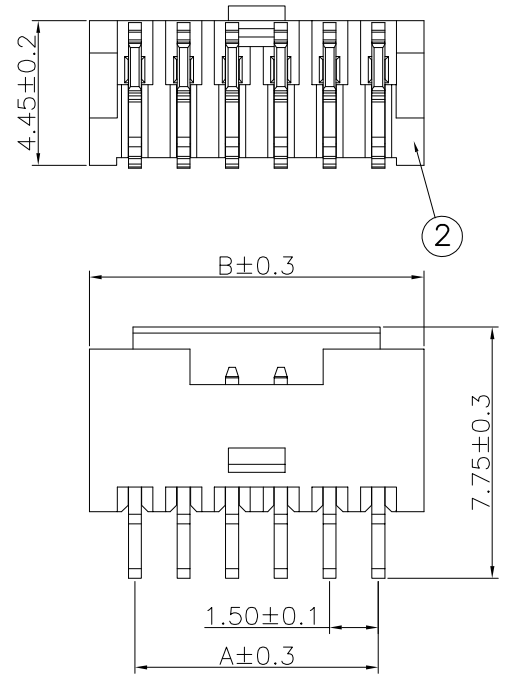

2	②	针座	LCP	1	UL94V-0
1	①	插针	铜	N*	镀锡
序号	图号	名称	材料	数量	备注

Specifications/技术规格:

Current rating: 2.5A (AWG#24)
 额定电流: 2.5A (AWG#24)
 Voltage rating: 250V AC, DC
 额定电压: 250V AC, DC
 Insulation Resistance: 1000MΩ Min.
 绝缘电阻: 最小1000MΩ
 Withstanding voltage: 500V AC 1Min
 耐电压: 500V AC 1分钟
 Contact Resistance: 20mΩ Max
 接触电阻: 最大20mΩ
 Operating Temperature: -25°C to +85°C
 工作温度: -25°C 到 +85°C

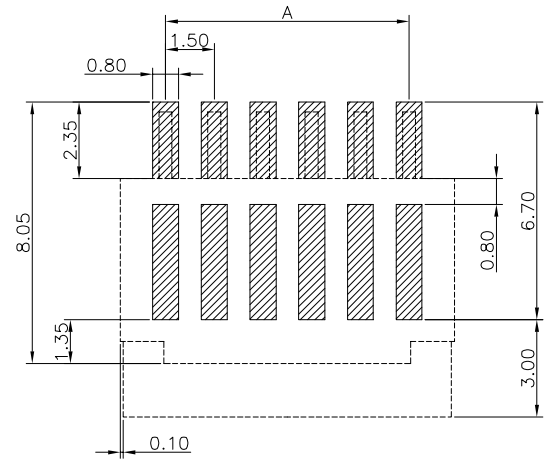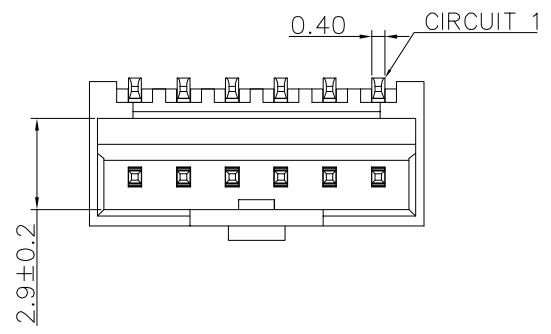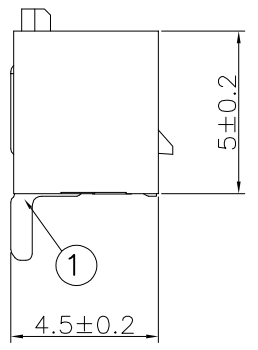

PCB LAYOUT

PIN 数	DIM	
	A	B
ZHG-2AWT	1.50	4.30
ZHG-3AWT	3.00	5.80
ZHG-4AWT	4.50	7.30
ZHG-5AWT	6.00	8.80
ZHG-6AWT	7.50	10.30
ZHG-7AWT	9.00	11.80
ZHG-8AWT	10.50	13.30
ZHG-9AWT	12.00	14.80
ZHG-10AWT	13.50	16.30
ZHG-11AWT	15.00	17.80
ZHG-12AWT	16.50	19.30
ZHG-13AWT	18.00	20.80
ZHG-14AWT	19.50	22.30
ZHG-15AWT	21.00	23.80

浙江快利电子有限公司
 ZheJiang KuaiLi Electronic Co., LTD.

GENERAL TOLERANCE	
X. ° : ±3°	X. : —
.X ° : ±2°	X.X : ±0.30
.XX ° : ±1°	X.XX : ±0.20
.XXX ° : ±0.5°	X.XXX : ±0.10

DESIGN: 张乐友 DATE: 2026.03.20
 CHECKED: 王子林 DATE: 2026.03.20
 APPROVED: 朱建华 DATE: 2026.03.20

DWG. NO.
 PART NO.

TITLE:
ZHG-NAWT